

PRODUCT FEATURES

LIVE STREAMING VIDEO AND SECURITY CAMERA

SAPPHIRE STATIC BULLET SERIES

Secure and stream the jobsite 24/7 with the Sapphire ultra-wide static video camera. This camera stays fixed in one position for steady streaming.



Solar power compatible



Withstands extreme temperature



Forensic wide dynamic range



Built-in cyber security firmware



130° Field of View



Integrated, industrial cellular antenna



IR Illumination


Live, 24/7 Streaming Video


Searchable image history by date and time

Weather data stored with every image

Instant snapshot of current view

Zoom within the image for details

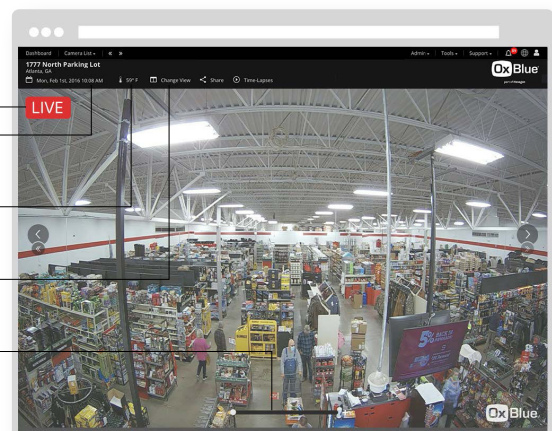

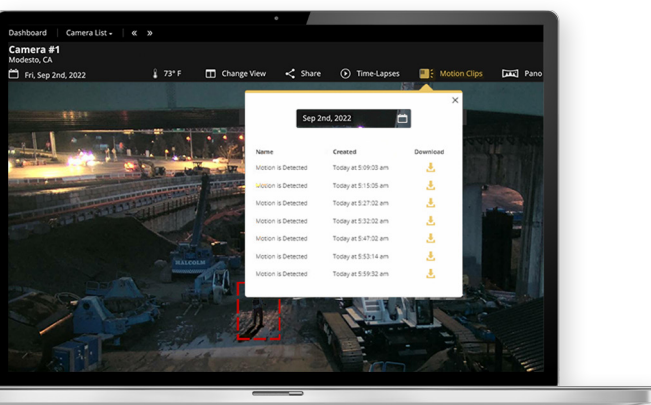

Use smart security features and real-time alerts

Motion detection is automatically included in every Sapphire camera, and focuses on true threats — filtering out bugs, birds and distant traffic.

- AI based object detection and classification
- Customize monitoring hours
- Instant alerts help you self-manage security

Add a first line of defense to the jobsite

Save time and resources by directing motion alerts to professional monitoring agents. They'll review and dispatch police as needed.

- UL-Certified
- 5 Diamond
- TMA Member



Deter threats with optional hardware

Add lights, alarms and talk down speakers to your camera to combat theft and trespassing. Optional hardware helps support common Builder's Risk insurance requirements and are solar-compatible.

- Blue strobe light and siren
- Talk down speakers
- Anti-tamper switch
- Onboard battery backup

SAPPHIRE SERIES

STATIC SPECIFICATIONS

	8 Megapixel (3264 x 2448)	4 Megapixel (2688 x 1520)
Live Stream Resolution		
	1920 x 1080; 6 frames/second	1920 x 1080; 6 frames/second
Viewing Range		
	109° Horizontal Field of View	130° Horizontal Field of View
	57° Vertical Field of View	73° Vertical Field of View
	2.08x Optical Zoom	
Dimensions		
	10.25" L (26.00 cm)	6.9" L (17.52 cm)
	5.19" W (13.20 cm)	4" W (10.16 cm)
	5.19" H (13.20 cm)	4" H (10.16 cm)
Weight		
	2.2 lb (1.0 kg) installed	1.1 lb (0.50 kg) installed
IR Illumination		
	Up to 82 ft; Site condition-dependent	Up to 50 ft; Site condition-dependent
Operating Environment		
	-22 to 122° F (-30 to 50° C)	-22 to 122° F (-30 to 50° C)
Data Connection		Optional 110V AC Hardware
Wireless (Cellular LTE)		Talk down speakers/strobe/microphone, battery backup, cabinet tamper-switch
Power Connection		Optional Solar Security Hardware
120/240 VAC (30 watts normal usage); Solar Compatible		Talk down speaker/strobe/microphone and cabinet tamper-switch (backup battery already included)
Memory		
Still Image - Unlimited Remote Storage Video - 128 GB onboard; approx 2 wks		

Access to live video and video on demand requires login with a username. Monthly data usage limited to 30 GB per camera. Some live video products may provide up to two (2) weeks of local video archiving on the camera & data retrieval requires an additional fee. Three (3) year warranty on live video products from the date of purchase. Some exceptions may apply.

Every self-contained OxBlue construction camera comes ready to meet your jobsite monitoring needs right out of the box. No need for additional hardware or software - or jobsite internet connection.